


Master-slave mode console connection diagram

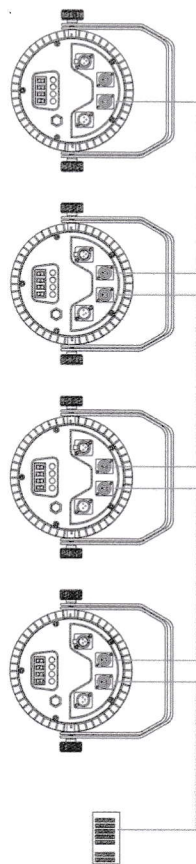

8.DMX 512 Control Mode: 10 Channel Model(A001)

Kanal	Funktion	illustrieren
CH1	Total dimming	R, G, B, W, Y, P total dimming, from dark to bright
CH2	R dimming	Red dimming, from dark to bright
CH3	G dimming	Green dimming, from dark to bright
CH4	B dimming	Blue dimming, from dark to bright
CH5	W dimming	White dimming, from dark to bright
CH6	Y dimming	Amber tone light, from dark to bright
CH7	P dimming	Purple dimming, from dark to bright
CH8	Total strobe	R, G, B, W, Y, P Total strobe, from slow to fast
CH9	Function selection	000-050: CH1-CH7 control;
		051-100: Color output (8 options), selected by CH10;
		101-150: Colors Jump Change.
		151-200: Colors Gradate.
		201-250: Colors Pulse Change.
CH10	Functional speed	251-255: Sound-Active
		Function speed, from slow to fast

DMX 512 Control Mode: 6 Channe Model(d0001)

Kanal	Funktion	illustrieren
CH1	R dimming	Red dimming, from dark to bright
CH2	G dimming	Green dimming, from dark to bright
CH3	B Dimming	Blue dimming, from dark to bright
CH4	W dimming	White dimming, from dark to bright
CH5	Y dimming	Amber tone light, from dark to bright
CH6	P dimming	Purple dimming, from dark to bright