

SAHAUHY

12LED MINI PAR LIGHT USER MANUAL



Specification

1. Voltage: AC90-240V 50-60HZ
2. Light color: 12LED (R3, G3, B3, W3)
3. Control mode: auto, sound, DMX512, master-slave, strobe




Display Panel Key Functions

Button	Function Description	Functional Description
[MENU]	Feature Selection	DMX console/Color selection/Gradient/Pulse/Jump/Voice/Manual dimming
[UP]	Select Up	Increase value
[DOWN]	Select Down	Reduce value
[ENTER]	Ok button	All the key to save settings press, next boot for the current interface features

The display panel functions

1.d001-d512	DMX console mode, by subtraction address code value up and down keys
2.Sd01-Sd16	Jump, the speed of the UP and DOWN keys to change, the larger the value, the faster
3.Rb01-rb16	Gradient, the speed of the UP and DOWN keys to change, the larger the value, the faster
4.PL01-PL16	Pulse charge, the speed of the UP and DOWN keys to change, the larger the value, the faster
5.Soud:	Voice, changing effects triggered by music
6.R000-R255	Manual dimming R, by the UP and DOWN keys to change the brightness of the RED, the larger the value, the brighter
7.G000-G255	Manual dimming G, by the UP and DOWN keys to change the brightness of the GREEN, the larger value, the brighter
8.b000-b255	Manual dimming B, by the UP and DOWN keys to change the brightness of the BLUE, the larger the value, the brighter
9.u000-u255	Manual dimming U, by the UP and DOWN keys to change the brightness of the Color, the larger the value, the brighter
10.FL01-FL16	Strobe, the speed of the UP and DOWN keys to change, the large the value, the faster
11.CC01-CC64	Color selection, by the UP and DOWN keyes to select different color combinations

LED MINI PAR LIGHT REMOTER CONTROL MANUAL

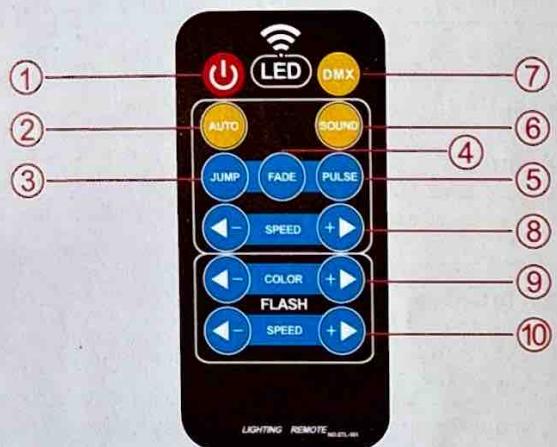

CHANNEL	CHANNEL VALUES	Functional Description
Ch1	0-255	The total dimming (Combined CH2, CH3, CH4 use)
Ch2	0	Red off
	1-255	Adjust the brightness of the red (From dark to light)
Ch3	0	Green off
	1-255	Adjust the brightness of the green (From dark to light)
Ch4	0	Blue off
	1-255	Adjust the brightness of the blue (From dark to light)
Ch5	0	White off
	1-255	Adjust the brightness of the white (From dark to light)
Ch6	0-7	No flicker
	8-255	Strobe (From slow to fast), the larger the value, the faster
Ch7	0-10	Manual control
	11-60	Color selection
	61-110	Gradient, the larger the value, the faster
	111-160	Pulse, the larger the value, the faster
	161-210	Jump, the larger the value, the faster
	211-215	Voice
Ch8	0-255	Color selection/Discoloration speed (the larger the value, the faster)

When you received DMX signals, "d" keys will be flashing, otherwise not received.

V.Master and slave setting:

Two or more of the same two-wire signal lamps with 3-wire connection, Impose any one host [Color selection/Gradient/Variable pulse/Jump/Voice/Manual dimming], other fixtures are set d001.

Thank you for purchasing our products!

Get Support

Warranty:

30-Days Return ,

360-Days Repair ,

- 1.) If driver failed,please contact us,
- 2.) If LEDs failed,please contact us,
- 3.) Any questions,please contact us.

After-sales service:

In order to provide you more efficient service,please be kindly leave your order ID and brief description of the product problem by our company email,we will give you satisfactory reply within 24 hours due to time zone difference and day off. Please be patient.

Email:support@SAHAUHY.com

(or Add our Facebook:Sahauhy)

Official website:www.SAHAUHY.com

Contact Us

 OFFICIAL WEBSITE

www.SAHAUHY.com

 EMAIL US

support@SAHAUHY.com

SAHAUHY

12LED MINI PAP LIGHT USER MANUAL

- 1.If you are unhappy with our products,please contact us, we are very willing to work with you to slove any problem.
- 2.If you are happy with our products,By writing a product review,please share your experience.Thank you!

Email: support@SAHAUHY.com
Contact us on official website

www.SAHAUHY.com



