



MINER

Par LED 1818 IP65

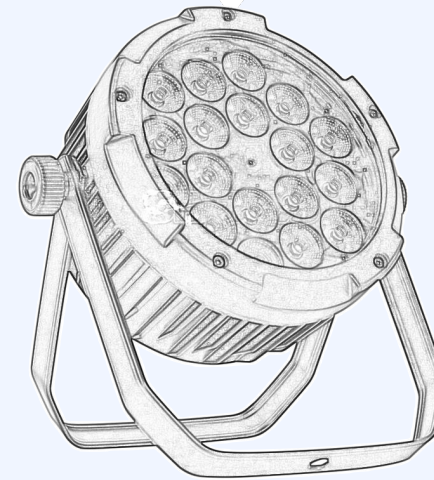

USER MANUAL



www.minerlight.it

Technical Specifications:

Power Supply	AC90-250V, 50/60Hz
Power Consumption	324W
LED Quantity	18pcs X 18WLEDs (RGBWAUV 6-IN-1 imported Taiwanese led chip)
Service Life	Exceed 50,000 hours
Waterproof Grade	IP65
DMX Channel	6/10CH
Working Mode	DMX512, Stand-alone, Master/Slave, Sound Active, Auto-Run
Dimension	55*55*33cm (4units/carton)
Weight	22kgs (4units/carton)

LED Display Menu Operating Instruction (After Choose function, press Enter button):

Item	Menu	Function
1	A001	10CH DMX Address (001-512) Press "Up" or "Down" button to plus or minus Address
1	d001	6CH DMX Address (001-512) Press "Up" or "Down" button to plus or minus Address
2	CC 99	RGBW Color Jumping (01—99) Press "Up" or "Down" button to change color jumping
3	CP 99	RGBW Color Gradient (01—99) Press "Up" or "Down" button to change color gradient
4	dE 99	RGBW Color Pulse Changing (01—99) Press "Up" or "Down" button to change color pulse changing speed
5	Soud	Sound Active

6	r255	Red Color (001-255) Press "Up" or "Down" button to change color brightness
7	G255	Green Color (001-255) Press "Up" or "Down" button to change color brightness
8	b255	Blue Color (001-255) Press "Up" or "Down" button to change color brightness
9	o255	White Color (001-255) Press "Up" or "Down" button to change color brightness
10	Y255	Amber Color (001-255) Press "Up" or "Down" button to change color brightness
11	P255	UV Color (001-255) Press "Up" or "Down" button to change color brightness

6CH DMX Control Channel List:-

Channel	Function	Remark
1	Red	Dimmer, from dark to light
2	Green	Dimmer, from dark to light
3	Blue	Dimmer, from dark to light
4	White	Dimmer, from dark to light
5	Amber	Dimmer, from dark to light
6	UV	Dimmer, from dark to light

10CH DMX Control Channel List:-

Channel	Function	Remark
1	Dimmer	RGBWAUV color, liner dimmer, from dark
2	Strobe	RGBWAUV Strobe, From slow to fast

3	Function	00-50: Blank 51-100: RGBWAUV color Jumping 101-150: RGBWAUV color Gradient 151-200: RGBWAUV color Pulse Changing
4	Speed	Function Speed
5	Red	From dark to light
6	Green	From dark to light
7	Blue	From dark to light
8	White	From dark to light
9	Amber	Dimmer, from dark to light
10	UV	Dimmer, from dark to light